




## Smart Module

60-Cell Monocrystalline PERC Module  
with Integrated Power Optimiser

SPV300-60MMJ

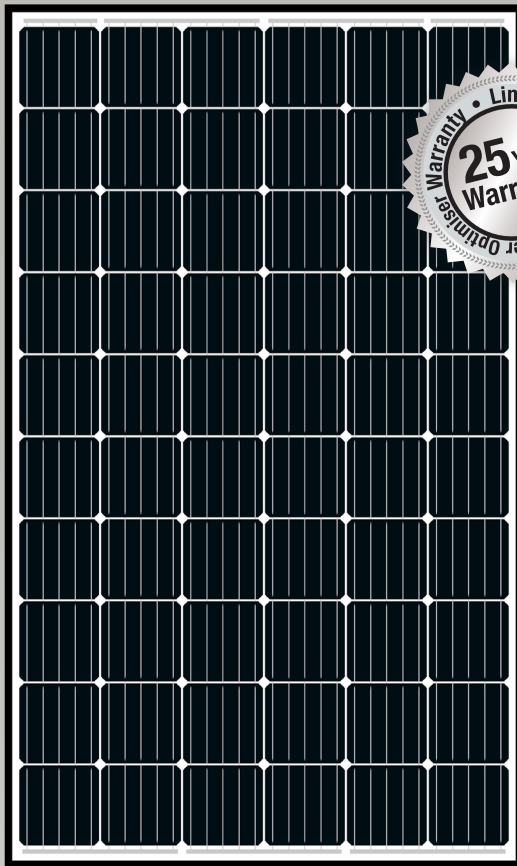

SMART MODULE

### PV to grid solution including full service from SolarEdge



- Easy installation with module pre-assembled optimiser
- Optimised energy output by constantly tracking the maximum power point (MPPT) of each module individually
- Module-level voltage shutdown for installer and firefighter safety
- Full visibility of system's performance from modules to grid
- Superior quality control with full automatic production line and 100% EL triple inspection
- Excellent mechanical loading and shock resistance performance
- An elegant design with black frame
- 12-year module warranty and 25-year performance warranty
- Specifically designed to work with SolarEdge inverters

### MODULE ELECTRICAL PROPERTIES

STC <sup>(1)</sup>		
Module Power	300	W
Max. Power Voltage (Vmp)	32.62	V
Max. Power Current (Imp)	9.2	A
Open Circuit Voltage (Voc)	39.75	V
Short Circuit Current (Isc)	9.64	A
Maximum System Voltage	1000	Vdc
Maximum Series Fuse Rating	15	A
Module Efficiency	18.3	%
Power Tolerance	0 ~ +5	W
NOCT <sup>(2)</sup>		
Module Power	223.3	W
Max. Power Voltage (Vmp)	30.34	V
Max. Power Current (Imp)	7.36	A
Open Circuit Voltage (Voc)	37.28	V
Short Circuit Current (Isc)	7.78	A

### MODULE MECHANICAL PROPERTIES

Cells	60 (6 x 10)	
Cell Type	Monocrystalline PERC	
Cell Dimensions	156 x 156	mm
Dimensions (L x W x H)	1650 x 992 x 40	mm
Front Design Load (snow)	3600	Pa
Front Test Load <sup>(3)</sup>	5400	Pa
Rear Design Load (wind)	2400	Pa
Rear Test Load <sup>(3)</sup>	3600	Pa
Weight	18.87	kg
Front Glass	3.2mm, coated toughened glass	
Frame	Black anodized aluminium	
Junction Box	IP67	
Connector Type	MC4 (PVKST4II-UR, PV-KBT4II-UR)	
Operating Temperature	-40 to +85	°C
Packaging Information (units per pallet)	26	

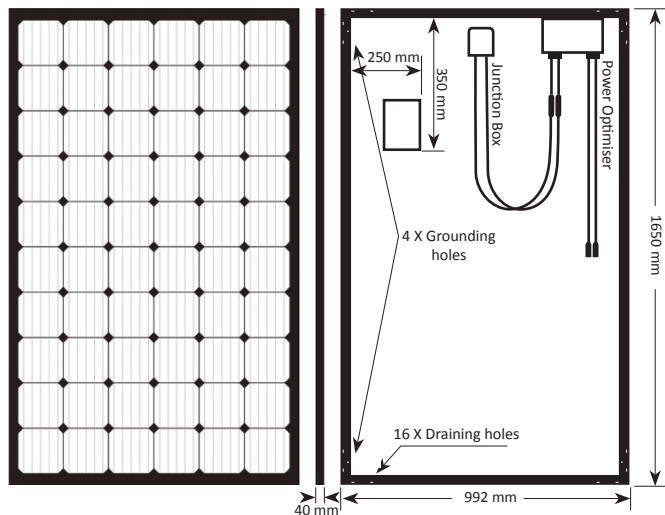

### CERTIFICATIONS & WARRANTY<sup>(4)</sup>

Module Certifications	IEC 61215:2016, IEC61730:2016, CEC listing AU, SII
Product Warranty	Power Optimiser — 25-year warranty, Module — 12-year warranty
Output Warranty of Pmax	25-year linear module warranty <sup>(5)</sup>

### TEMPERATURE CHARACTERISTICS

Temperature Coefficient Power (Pm)	-0.40	% / °C
Temperature Coefficient Voltage (Voc)	-0.29	% / °C
Temperature Coefficient Current (Isc)	0.04	% / °C
Operating Cell Temperature (NOCT)	45 ± 2	°C

<sup>(1)</sup> STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5.

<sup>(2)</sup> NOCT: Irradiance at 800 W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1 m/s.


<sup>(3)</sup> Safety factor of 1.5

<sup>(4)</sup> Certification pending

<sup>(5)</sup> 1<sup>st</sup> year: 97%, 80.2% power output over 25 years


### Linear Warranty

12-Year Product Warranty  
+ 25-Year Linear Power Warranty

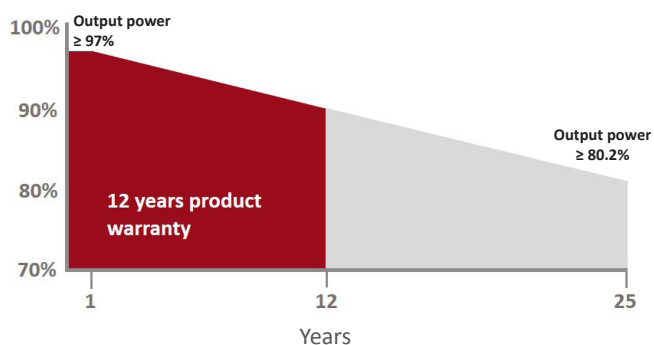

Made in china

### Module I-V Curve

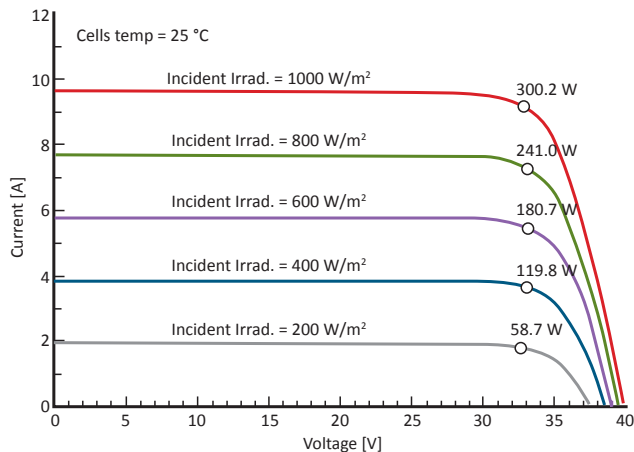



# Smart Module 60-Cell Monocrystalline PERC Module with Integrated Power Optimiser SPV300-60MMJ

POWER OPTIMISER PROPERTIES		
<b>INPUT</b>		
Rated Input DC Power	370	W
Absolute Maximum Input Voltage (Voc at lowest temperature)	60	
MPPT Operating Range	8 - 60	Vdc
Maximum Short Circuit Current (Isc)	11	Adc
Maximum Efficiency	99.5	%
Weighted Efficiency	98.8	%
Overvoltage Category	II	
<b>OUTPUT DURING OPERATION (POWER OPTIMISER CONNECTED TO OPERATING SOLAREEDGE INVERTER)</b>		
Maximum Output Current	15	Adc
Maximum Output Voltage	60	Vdc
<b>OUTPUT DURING STANDBY (POWER OPTIMISER DISCONNECTED FROM SOLAREEDGE INVERTER OR SOLAREEDGE INVERTER OFF)</b>		
Safety Output Voltage per Power Optimiser	1 ± 0.1	Vdc
<b>STANDARD COMPLIANCE</b>		
EMC	FCC Part15 Class B, IEC61000-6-2, IEC61000-6-3	
Safety	IEC62109-1 (class II safety), UL1741	
RoHS	Yes	
Fire Safety	VDE-AR-E 2100-712:2013-05	
<b>INSTALLATION SPECIFICATIONS</b>		
Operating Temperature Range	-40 - +85 / -40 - +185	°C / °F
Protection Rating	IP68 / NEMA6P	
Relative Humidity	0 - 100	%

PV SYSTEM DESIGN USING A SOLAREEDGE INVERTER		SINGLE PHASE HD-WAVE	SINGLE PHASE	THREE PHASE RESIDENTIAL <sup>(6)</sup>	THREE PHASE COMMERCIAL	
Minimum String Length (Power Optimisers)	P370	8		8 per array	16	
Maximum String Length (Power Optimisers)		25		25 per array	50	
Maximum Power per String		5700 (6000 with SE8000H, SE10000H)	5250	5700	11250	W
Parallel Strings of Different Lengths or Orientations				Yes		
Notes				Connect 2 arrays		

<sup>(6)</sup> Optimisers must be connected in two separate arrays. For complete design guidelines for the three phase residential inverters refer to: [https://www.solaredge.com/sites/default/files/three\\_phase\\_inverter\\_residential\\_design\\_installation\\_addendum\\_aus.pdf](https://www.solaredge.com/sites/default/files/three_phase_inverter_residential_design_installation_addendum_aus.pdf)